



Vacuum tube 12AT7W/6201 Tung-Sol is a miniature twin triode with equipotential cathodes, designed to amplify low frequency voltage in radio engineering devices.


Pin arrangement

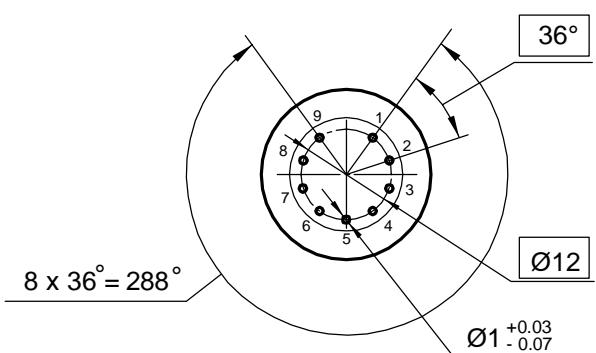

Electrode -to - lead connection diagram

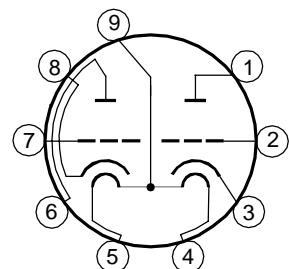

Dimensions

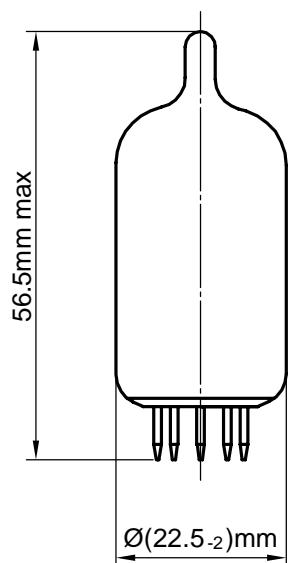

Lead designation	Name of electrode
1	Second triode plate
2	Second triode grid
3	Second triode cathode
4,5,9	Heater
6	First triode plate
7	First triode grid
8	First triode cathode

Electrical parameters

Parameters, conditions and units	Nominal	
	min	max
Heater current, mA at: filament voltage 6.3 V at: filament voltage 12.6 V	340 170	370 185
Grid back current, μ A, (at: filament voltage 6.3 V or 12.6 V, plate voltage 250 V, grid voltage minus 2.0 V, resistance in grid circuit 0.25 M Ω)	—	0.5
Plate current, mA, (at: filament voltage 6.3 V or 12.6 V, plate voltage 250 V, grid voltage minus 2.0 V)	7.0	16.0
First and second triodes plate current difference, % (at: filament voltage 6.3 V or 12.6 V, plate voltage 250 V, grid voltage minus 2.0 V)	—	± 25
Slope of characteristic, mA/V (at: filament voltage 6.3 V or 12.6 V, plate voltage 250 V, grid voltage minus 2.0 V)	4.1	6.8
Amplification factor (at: filament voltage 6.3 V or 12.6 V, plate voltage 250 V, grid voltage minus 2.0 V)	45	—
Cathode - heater insulation resistance, M Ω (at: filament voltage 6.3 V or 12.6 V, cathode - heater voltage ± 200 V)	20	—
Plate current at the beginning of the characteristic, μ A (at: filament voltage 6.3 V or 12.6 V, plate voltage 250 V, grid voltage minus 12.0 V)	—	60

Limiting Values

Parameters, units	Nominal	
	min	max
Filament voltage, V for parallel connection	6	6.6
for series connection	12	13.2
Plate voltage, V	—	330
Cathode - heater voltage, V	—	± 200
Power dissipation at the plate of each triode, W	—	3.25
Cathode current, mA	—	18
Grid circuit resistance for each of the triodes, M Ω fixed bias	—	0.25
self - bias	—	1.0

12AT7W/6201 Tung-Sol

$I_p=f(E_g)$


$E_f=6.3V$

$I_p(mA)$

$I_p=f(E_p)$

$E_f=6.3V$

$I_p(mA)$

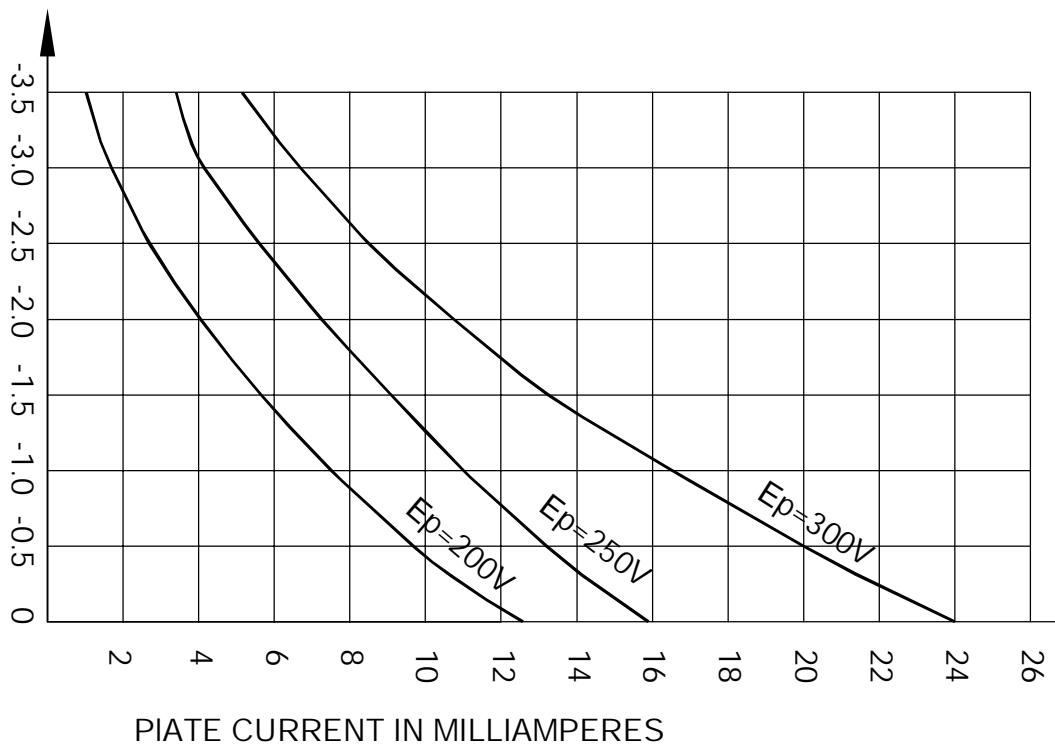

PIATE CURRENT IN MILLIAMPERES

GRID VOLTAGE IN VOLTS

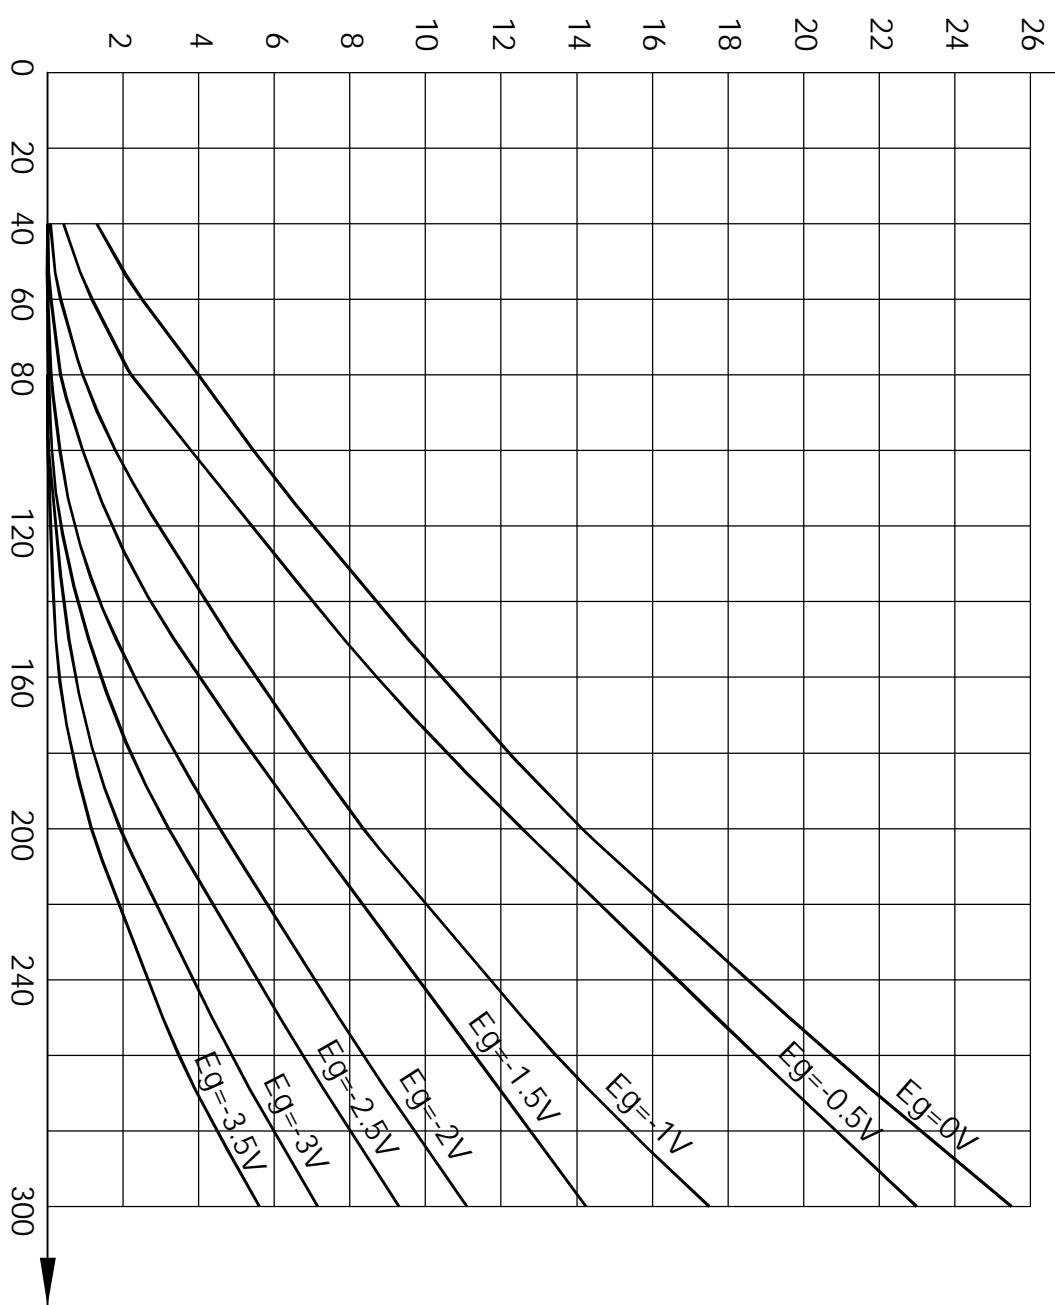


PLATE VOLTAGE IN VOLTS