



Vacuum tube 6H30Pi -EB/6Н30Π -ЕВ is a miniature twin triode with equipotential cathodes, designed to amplify low frequency voltage in radio engineering devices.


Pin arrangement

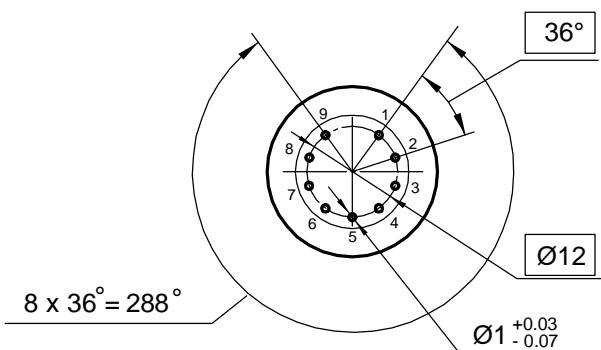

Electrode -to - lead connection diagram

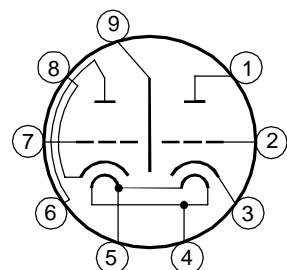

Dimensions

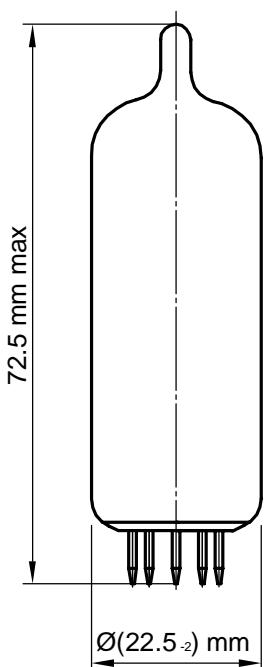

Lead designation	Name of electrode
1	Second triode plate
2	Second triode grid
3	Second triode cathode
4, 5	Heater
6	First triode plate
7	First triode grid
8	First triode cathode
9	Screen

## Electrical parameters

Parameters, conditions and units	Nominal	
	min	max
Heater current, mA	725	900
Grid reverse current, $\mu$ A , ( at: filament voltage 6.3 V, plate voltage 80 V, cathode circuit resistance 56 $\Omega$ ) resistance in grid circuit 0.15 M $\Omega$ )	—	1.5
Plate current, mA, ( at: filament voltage 6.3 V, plate voltage 80 V, cathode circuit resistance 56 $\Omega$ )	30	50
First and second triodes plate current difference, % ( at: filament voltage 6.3 V, plate voltage 80 V, cathode circuit resistance 56 $\Omega$ )	—	$\pm 20$
Plate current at the beginning of the characteristic, $\mu$ A ( at: filament voltage 6.3 V, plate voltage 80 V, grid voltage minus 12 V)		30
Slope of characteristic, mA/V ( at: filament voltage 6.3 V, plate voltage 80 V, cathode circuit resistance 56 $\Omega$ )	13	23
Amplification factor ( at: filament voltage 6.3 V, plate voltage 80 V, cathode circuit resistance 56 $\Omega$ )	12	18
Cathode - heater insulation resistance, M $\Omega$ (at: filament voltage 6.3 V, cathode -heater voltage $\pm 150$ V)	6	—

## Limiting Values

Parameters, units	Nominal	
	min	max
Filament voltage, V	6	6.6
Plate voltage, V	—	250
Cathode - heater voltage, V	—	$\pm 400$
Cathode current of each triode (average), mA	—	100
Power dissipation at the plate of each triode, W	—	4.0
Grid circuit resistance for each of the triodes, k $\Omega$ self - bias	—	300

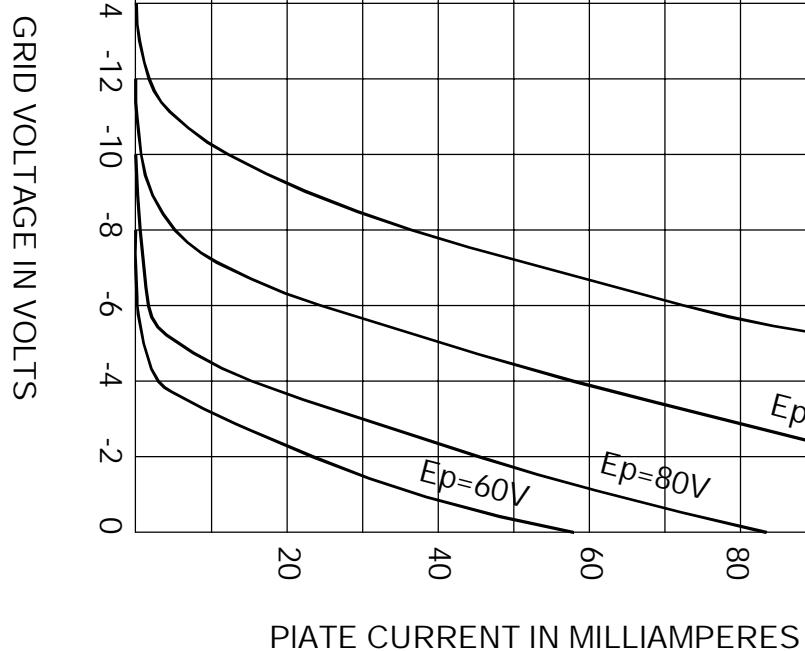


PLATE VOLTAGE IN VOLTS