



Vacuum tube 12DW7EH is a miniature twin triode with equipotential cathodes, in which the first triode is a voltage amplifier, and the second triode is a phase inverter, designed to amplify low frequency voltage in radio engineering devices.


Pin arrangement

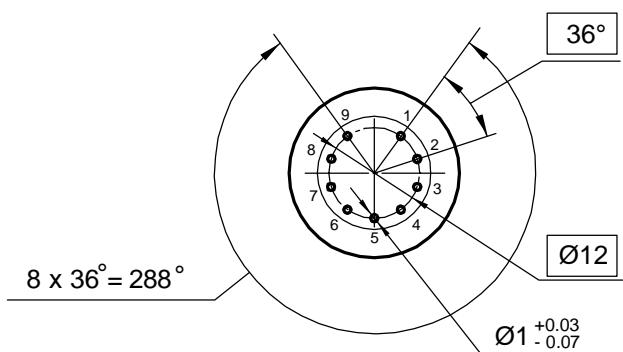

Electrode -to - lead connection diagram

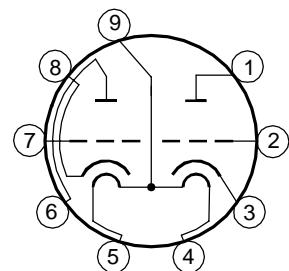

Dimensions

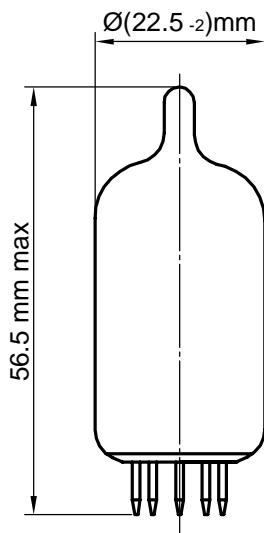

Lead designation	Name of electrode
1	Second triode plate
2	Second triode grid
3	Second triode cathode
4, 5, 9	Heater
6	First triode plate
7	First triode grid
8	First triode cathode


## Electrical parameters

Parameters, conditions and units	Nominal	
	min	max
Heater current, mA at: filament voltage 6.3 V at: filament voltage 12.6 V	300 150	350 175
First triodes grid reverse current, $\mu$ A,( at: filament voltage 6.3 V or 12.6 V, plate voltage 250 V, grid voltage minus 2.0 V, resistance in grid circuit $1.0 \text{ M } \Omega$ )	—	0.2
Second triodes grid reverse current, $\mu$ A,( at: filament voltage 6.3 V or 12.6 V, plate voltage 250 V, grid voltage minus 8.5 V, resistance in grid circuit $0.25 \text{ M } \Omega$ )	—	0.2
First triode plate current, mA, ( at: filament voltage 6.3 V or 12.6 V, plate voltage 250 V, grid voltage minus 2.0 V)	0.75	2.0
Second triode plate current, mA, ( at: filament voltage 6.3 V or 12.6 V, plate voltage 250 V, grid voltage minus 8.5 V)	7.8	13.5
First triode plate current at the beginning of the characteristic, $\mu$ A ( at: filament voltage 6.3 V or 12.6 V, plate voltage 250 V, grid voltage minus 4.0 V)	—	35
Second triode plate current at the beginning of the characteristic, $\mu$ A ( at: filament voltage 6.3 V or 12.6 V, plate voltage 250 V, grid voltage minus 24.0 V)	—	100
First triode slope of characteristic, mA/V ( at: filament voltage 6.3 V or 12.6 V, plate voltage 250 V, grid voltage minus 2.0 V)	1.4	—
Second triode slope of characteristic, mA/V ( at: filament voltage 6.3 V or 12.6 V, plate voltage 250 V, grid voltage minus 8.5 V)	1.75	3.0
First triode amplification factor ( at: filament voltage 6.3 V or 12.6 V, plate voltage 250 V, grid voltage minus 2.0 V)	75	—
Second triode amplification factor ( at: filament voltage 6.3 V or 12.6 V, plate voltage 250 V, grid voltage minus 8.5 V)	13	—
Cathode - heater insulation resistance, $\text{M } \Omega$ ( at: filament voltage 6.3 V or 12.6 V, cathode -heater voltage $\pm 200 \text{ V}$ )	20	—

## Limiting Values

Parameters, units	Nominal	
	min	max
Filament voltage, V for parallel connection	6	6.6
for series connection	12	13.2
Plate voltage, V	—	330
Cathode - heater voltage, V	—	± 200
First triode cathode current, mA	—	9
Second triode cathode current, mA	—	22
Power dissipation at the plate of first triode, W		1.2
Power dissipation at the plate of second triode, W		3.3
Grid circuit resistance for first triode, M Ω fixed bias	—	1.0
self - bias	—	2.2
Grid circuit resistance for second triode, M Ω fixed bias	—	0.25
self - bias	—	1.0

12DW7EH  
first triode

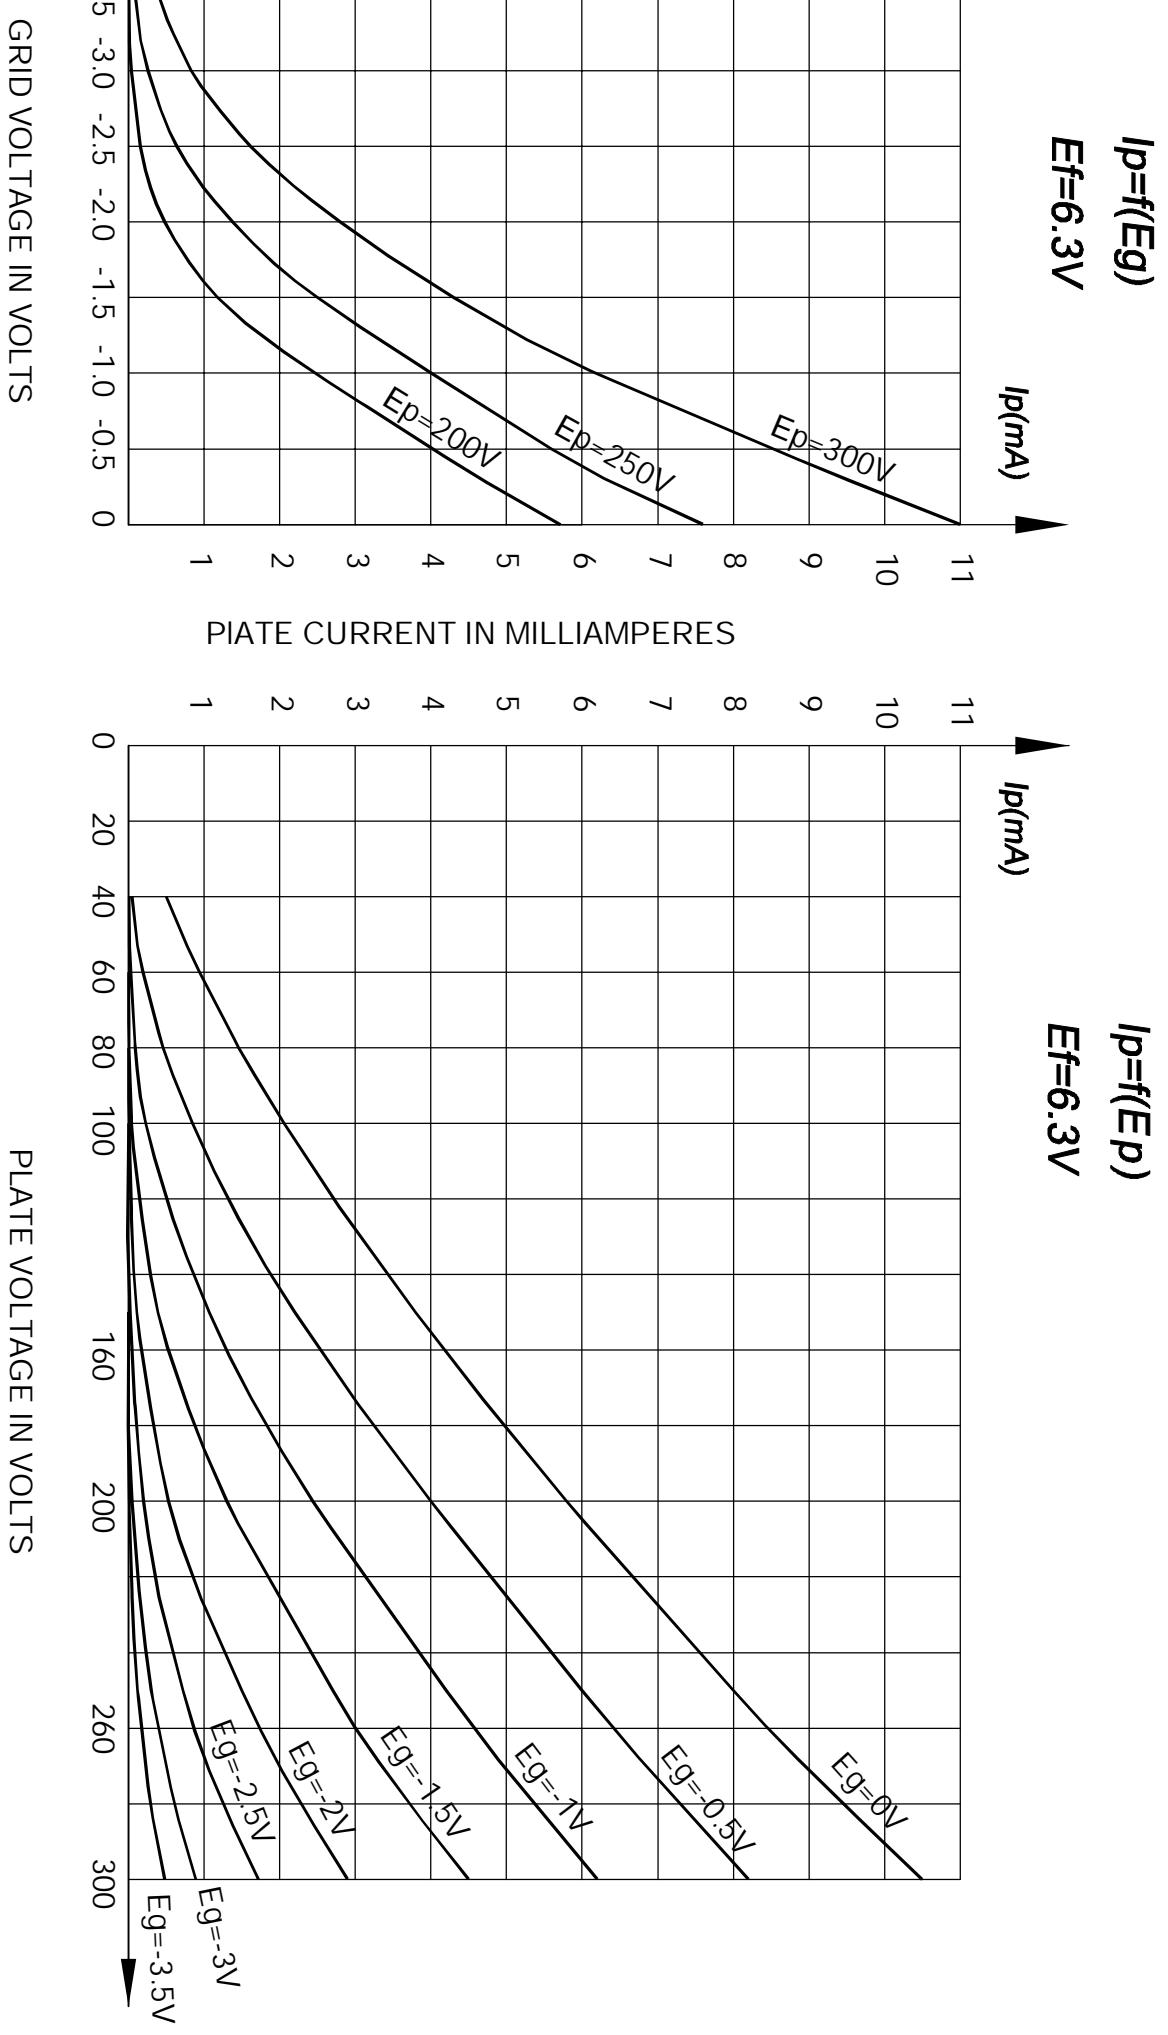

12DW7EH  
second triode

