



PSVANE

www.psvane.com

Changsha Hengyang Electronics Co.Ltd

Mail:info@psvane.com

Tel:+86073184205066

EL34C EL34

Heater

UH.....	6.3	V
IH.....	1.5	A

Maximum Rating




Ua.....	800	V
Ug2.....	500	V
Ug1.....	-100	V
Pa.....	25	W
Pg2.....	8	W
Ik.....	150	mA

Rg1

With cathode bias.....	0.7	MΩ
With fixed bias.....	0.5	MΩ
Uh-k.....	±	V
Tbulb.....	250	°C

Direct Interelectrode Capacitances

Input.....	15.2	PF
Output.....	8.4	PF
Grid to plate.....	1.1	PF

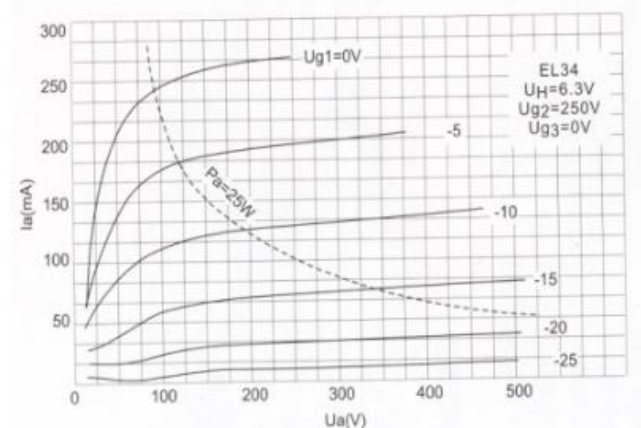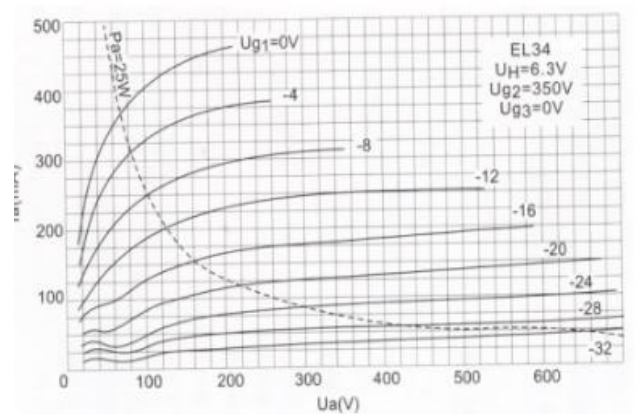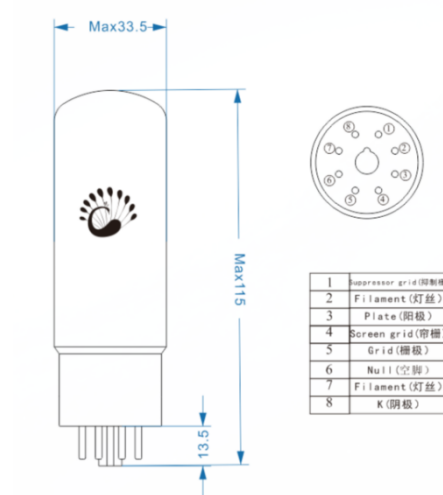



PSVANE

www.psvane.com

Changsha Hengyang Electronics Co.Ltd

Mail:info@psvane.com

Tel:+86073184205066

Grid to filament.....	1.0	PF
Cathode to filament.....	10	PF

Static Parameter

U_a	250	V
U_{g2}	250	V
U_{g3}	0	V
$-U_{g1}$	12.2	V
I_a	100	mA
G_m	11	mA/V
r_i	15	k Ω
μ_{g1-g2}	11	

