

# SVETLANA TECHNICAL DATA

## SV83

### Audio Power Pentode



**T**he Svetlana™ SV83 is a miniature glass-envelope power pentode intended for use as a driver or output device in high-quality audio amplifiers. Features include plate dissipation 12 watts; low distortion; high transconductance; internally shielded for low hum pickup; and pinout compatibility—EL84 can be used in an SV83 circuit without modification. The highly linear SV83 is similar to the EL84 with the exception of basing connections and screen-grid ratings.

#### Characteristics

##### Electrical

Cathode	Oxide-coated, unipotential
Heater voltage (AC or DC)	6.3 volts AC or DC ( $\pm 0.6$ volts)
Heater current	760 mA $\pm 60$ mA
Heater-cathode voltage	$\pm 100$ volts peak
Amplification factor (nominal)	25
Transconductance (nominal)	15,000 $\mu$ S
Interelectrode capacitances (typical), with cathode grounded:	
Grid to cathode	13.5 pF
Anode to cathode	7.0 pF
Grid to anode	0.07 pF



##### Mechanical

Base	standard 9-pin miniature, glass button
Basing diagram	see below
Socket	standard 9-pin miniature
Operating position	Any (vertical for convection cooling)
Nominal dimensions:	
Height of glass envelope	71.5 mm (2.81 in.)
Diameter of glass envelope	22.5 mm (.89 in.)
Overall height	78.5 mm (3.09 in.)
Net weight	20 g (.71 oz.)


##### Maximum ratings

Anode voltage, DC	300 V
Anode dissipation	12 W
Screen voltage, DC	200 V
Screen dissipation	1.5 W
Cathode current, continuous	90 mA
Grid voltage	-450 V
Maximum grid-circuit resistance (self-bias)	1 megohm
Envelope temperature	200° C

Svetlana Outline drawing

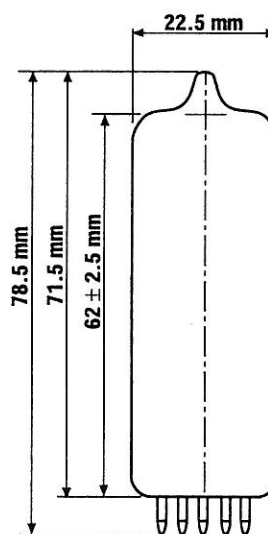

# Svetlana SV83 Audio Power Pentode



**Svetlana**  
ELECTRON DEVICES

